


# WIPERS

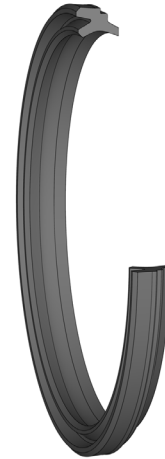

Wipers are used to wipe dirt and foreign matter from the piston rod that retracts into the system, protecting the hydraulic medium from contamination.

Double-action wipers also have the task of retaining the residual oil film on the piston rod. During the retraction movement, the residual oil is then conveyed back into the system via a leakage borehole. In open groove designs, elastomer and thermoplastic wipers with metal housings also have the job of ensuring a firm fit by means of a press-fit add-on.

## SEALING MATERIALS

### NBR (acrylonitrile butadiene rubber)

In general, NBR wipers are used in the light to medium operating range due to their elastic characteristics.

### TPU (thermoplastic polyurethane)

TPU stands out for its high resistance to wear and very high resistance to extrusion, and very good ozone resistance.

### PTFE (polytetrafluoroethylene)

Wipers made of PTFE are suited for higher slide speeds, have very good wear characteristics and very low frictional values.

## MEDIA RESISTANCE

Nitrile butadiene rubber (NBR), thermoplastic polyurethane (TPU) and polytetrafluoroethylene (PTFE) are resistant to

- Hydraulic oils in accordance with DIN 51524 Part 1 - 3
- Lubricating oils and greases based on mineral oil
- Flame retardant hydraulic fluids HFA, HFB and HFC in accordance with VDMA 24317

## APPLICATIONS

Depending on the choice of profile, wipers can be used in numerous applications such as

- Farm equipment
- Construction machinery
- Truck loading cranes
- Injection molding machines
- Handling devices
- Industrial trucks
- Standard cylinders
- Presses
- Switching valves
- and many more

## DIMENSIONS

The currently available dimensions can be found on our online ordering platform **EASY** and in our webshop at [www.dichtomatik.com](http://www.dichtomatik.com).

## MOUNTING

For larger dimensions, wipers made of NBR, TPU and PTFE can be easily installed in pierced grooves. In the case of PTFE wipers, calibration is recommended afterwards. Wipers with a metal housing require an open groove design.

## WIPERS

Profile	Type	Material	Shore A hardness	Temperature (°C)	Colour	Glidespeed (M/S)	Single-action	Double-action	Wiping effect
	AE40	NBR	90	-30 to +110	Black	≤ 2	X		Works well against dirt and dust
	AE41	NBR	90	-30 to +110	Black	≤ 2	X		Works well against dirt and dust
	AM43	NBR	90	-30 to +110	Black	≤ 1	X		Works well against dirt and dust
	AM45	NBR	90	-30 to +110	Black	≤ 1	X		Works well against dirt, dust and moist environments
	AD51	NBR	90	-30 to +110	Black	≤ 1		X	Works well against dirt and dust
	AE42	TPU	90	-40 to +100	Blue	≤ 2	X		Works well against dirt and dust
	AE47	TPU	90	-40 to +100	Blue	≤ 2	X		Works very well against dirt and dust
	AM44	TPU	95	-40 to +100	Blue	≤ 2	X		Best wiping effect against dirt and dust
	AM54	TPU	95	-40 to +100	Blue	≤ 1	X		Works well against dirt and dust
	AD48	TPU	95	-40 to +100	Blue	≤ 1		X	Works very well against dirt and dust
	ADM55	TPU	95	-40 to +100	Blue	≤ 1		X	Works very well against dirt and dust
	AD60	PTFE Bronze		-30 to +100		≤ 15		X	Works well
	AD61	PTFE Bronze		-30 to +100		≤ 15		X	Works well
	AE80	PTFE Bronze		-30 to +100		≤ 15	X		Works very well against dirt and dust

**Note:** The values indicated here are maximum values. All of them must not be achieved simultaneously.

The information contained herein is considered to be reliable, but no assurances, warrants or guarantees whatsoever, of any kind, are provided with regard to their correctness or suitability for any purpose. The information reproduced herein is based on the current state of the technology and is not necessarily indicative of the performance of the end product. Complete testing and the performance of the end product are the user's responsibility.

[www.dichtomatik.com](http://www.dichtomatik.com)



**DICHTOMATIK**  
Any seal. Any time.

a brand of  
 **FREUDENBERG**